

# SENSORS LX210:40.64.02

## PRODUCT DESCRIPTION


The X3 LX210 replaces the LX200 series. They are designed as a confirmable and durable sensor for measuring interface pressures. These capacitive sensors are ideal for assessing automotive and aerospace ingress-egress, seat design, and manufacturing quality. The LX210 series of sensors are highly accurate due to high repeatability, low hysteresis, and low creep characteristics. Due to their pressure range they have also been used in a variety of research and product testing environments.

SENSING	
<b>Sensor Technology</b>	Capacitive Pressure Imaging
<b>Pressure Range</b>	0.1–15psi
	0.07–10.3N/cm <sup>2</sup>
<b>Spatial Resolution</b>	0.5"   12.7mm
<b>Accuracy</b>	± 5% full scale*
<b>Sampling Frame Rate</b>	39 frames/s**

PHYSICAL CHARACTERISTICS		
<b>Total Area</b>	26" x 38"	66.3cm x 96.7cm
<b>Sensing Area</b>	20" x 32"	50.8cm x 81.2cm
<b>Thickness</b> (Sensing Area, uncompressed)	0.03"	0.09cm
<b>Thickness</b> (Border – cabling side)	0.04"	0.11cm
<b>Border Width</b> (cabling side)	4.5"	11.4cm
<b>Border Width</b> (non-cabling side)	2"	5.1cm
<b>Cable</b>	46.5" x 2" x 0.16"	118cm x 5.1cm x 0.4cm
<b>Connector</b>	4.76" x 2.76" x 0.09"	12.1cm x 7cm x 0.2cm

SENSING	
<b>Ambient Temperature</b>	10°C–40°C
<b>Ambient Humidity</b>	5% to 90% RH

## LX210:40.64.02

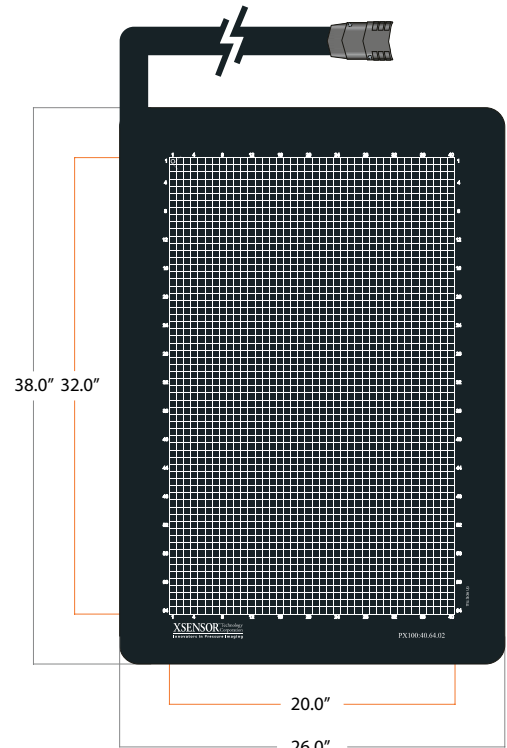

## KEY FEATURES

- High-resolution sensors with a 12.7 mm pitch (resolution) and 2,560 sensing points
- Very good repeatability
- Low hysteresis and consistent data
- Designed for comfort and healthcare pressure seating applications
- Durable sensor that conforms well to surfaces with a proven track record

## REQUIREMENTS FOR OPERATION

- Each LX210:40.64.02 sensor must be connected to one X3 PRO SENSOR PACK
- The X3 PRO SENSOR PACK must be connected to an X3 PRO
- The X3 PRO needs to be connected to a power supply and a computer running XSENSOR software to function

\* When verified using the standard XSENSOR verification process.

\*\*Sampling rate based on using X3 PRO Electronics. Frame rate may vary based on computer configuration.