

SENSORS LX205:40.40.10

PRODUCT DESCRIPTION


The LX205:40.40.10 is a mid-range pressure sensor with over 16,000 sensing points. The sensor can be used for measuring hand pressures on surfaces, automated clamping pressures, seal pressures, and for higher pressure research or design testing. The LX205:40.40.10 is a thin and conformable sensor that can fit into tight spaces and can be used on uneven surfaces. Additionally, the sensor provides a very fast data acquisition rate for capturing rapid movements.

SENSING	
Sensor Technology	Capacitive Pressure Imaging
Pressure Range	0.1-15psi
	0.7-10.3N/cm ²
Spatial Resolution	0.1" 2.54mm
Accuracy	± 10% full scale*
Sampling Frame Rate	39 frames/s**

PHYSICAL CHARACTERISTICS		
Total Area	9.7" x 9.7"	24.8cm x 24.8cm
Sensing Area	4" x 4"	10.2cm x 10.2cm
Thickness (Sensing Area, uncompressed)	0.03"	0.09cm
Thickness (Border – cabling side)	0.04"	0.11cm
Border Width (cabling side)	4"	10.2cm
Border Width (non-cabling side)	1.7"	4.4cm
Cable	31.5" x 2" x 0.16"	80cm x 5.1cm x 0.4cm
Connector	4.76" x 2.76" x 0.9"	12.1cm x 7cm x 2.3cm

SENSING	
Ambient Temperature	10°C–40°C
Ambient Humidity	5% to 90% RH

LX205:40.40.10

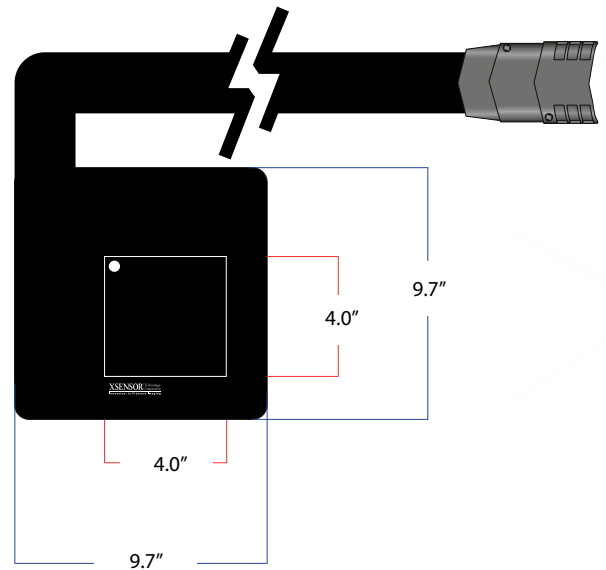

KEY FEATURES

- High-resolution sensors with a 2.54 mm pitch (resolution) and 1,600 sensing points
- Designed for high-quality pressure images with fast data acquisition
- Excellent for both lab and environmental testing
- Conformable sensor that can measure pressures on uneven surfaces

REQUIREMENTS FOR OPERATION

- Each LX205:40.40.10 sensor must be connected to one X3 PRO SENSOR PACK
- The X3 PRO SENSOR PACK must be connected to an X3 PRO
- The X3 PRO needs to be connected to a power supply and a computer running XSENSOR software to function

* When verified using the standard XSENSOR verification process.

**Sampling rate based on using X3 PRO Electronics. Frame rate may vary based on computer configuration.